




VI -MATRIX



Model	VI-SO-4-M-192x64	VI-SO-5-M-160x64	VI-SO-8-M-160x48	VI-DO-8-M-160x48
LED Typ	SMD	SMD	SMD	DIP
Auflösung	192 x 64 px	160 x 64 px	160 x 48 px	160 x 48 px
max. Helligkeit	>6500 cd/m ²	>6500 cd/m ²	>6000 cd/m ²	>8000 cd/m ²
Farbtemperatur	5000 - 9500 K	5000 - 9500 K	5000 - 9500 K	5000 - 9500 K
idealer Betrachtungsabstand	ab 4m	ab 5m	ab 8m	ab 8m
Eingangsspannung	220 VAC	220 VAC	220 VAC	220 VAC
Leistungsaufnahme typ.	56 Watt	75 Watt	133 Watt	100 Watt
Leistungsaufnahme max	224 Watt	300 Watt	530 Watt	450 Watt
Maße (BxHxT)	768 x 256 x 110 mm ³	800 x 320 x 110 mm ³	1280 x 384 x 125 mm ³	1280 x 384 x 125 mm ³
Gewicht	5,5 Kg	6,7 Kg	16 Kg	16 Kg
IP Klasse (vorne/ seite)	IP65 / IP54	IP65 / IP54	IP65 / IP54	IP65 / IP54
Steuerung	Asynchron, 4 Gbyte ROM, 512 MB RAM, 100M Ethernet, USB			
Unterstützte Media File Formate	Bilder: .bmp; .jpg; .jpeg; Video: .giv; .swf; .avi; .3GP; .asf; .avm; .avs; .dat; .flv; .mkv; .mov; .mp4; .mpeg; .mpg; .nsv; .wmv			

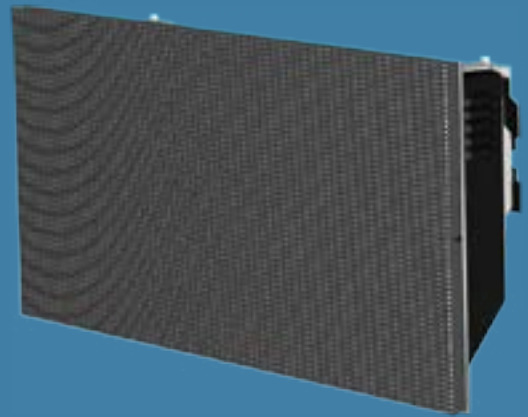